


# aceler

## WATER HEATER

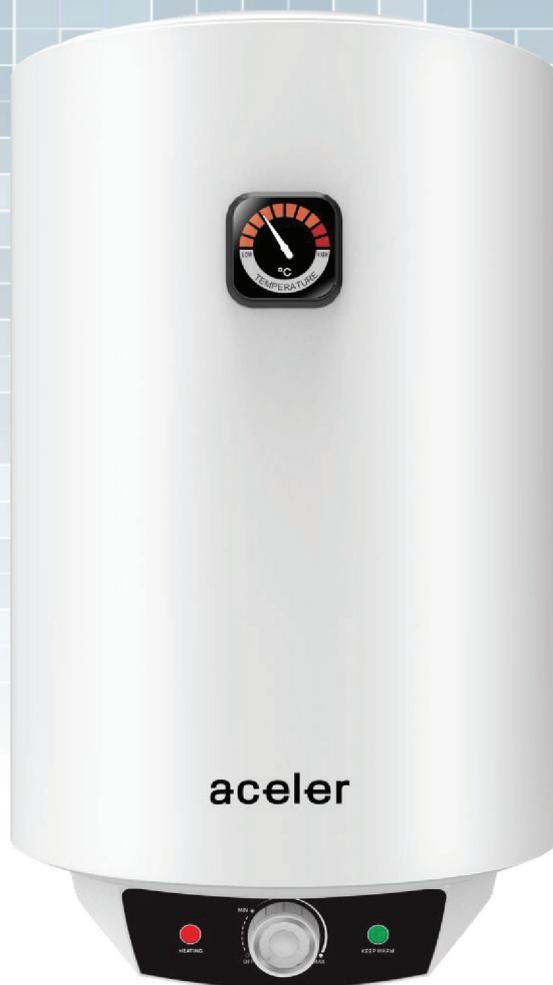


# ACELER WATER HEATER

Your source of perfect warm water



## PRODUCT OVERVIEW

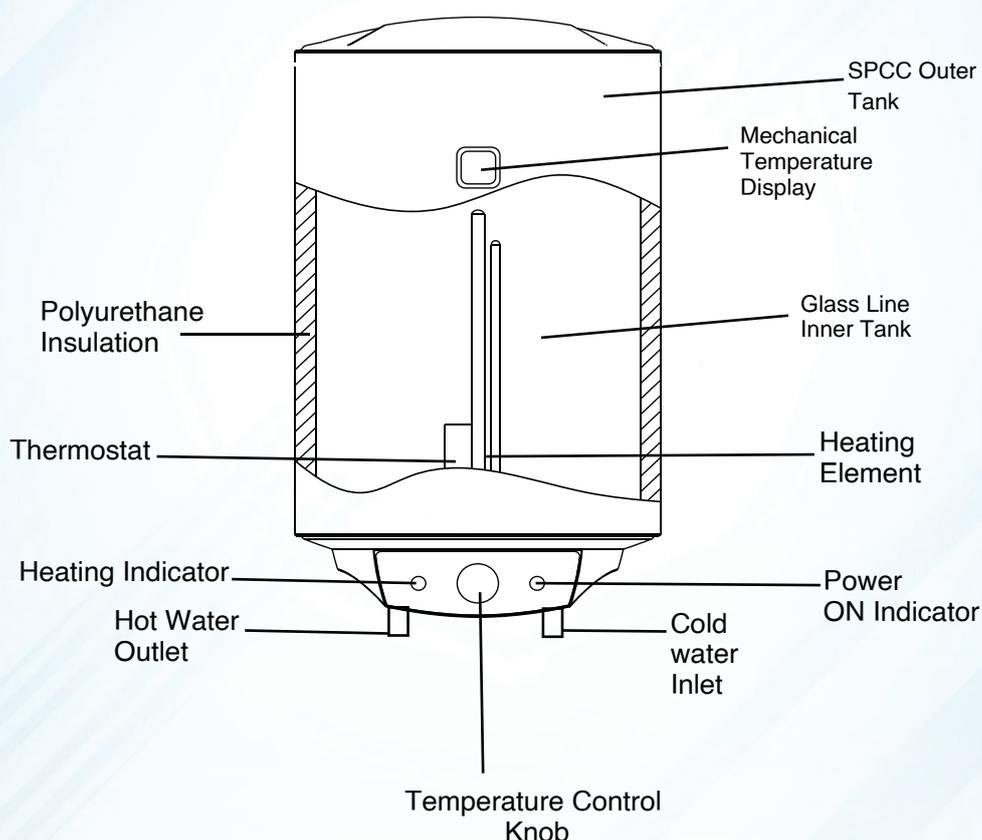

Aceler's water heater is equipped with a self-produced blue crystal inner tank that features an enamel coating applied using World-class dry powder spray technology. This advanced coating method involves the use of specialised equipment to apply a dry powder coating material to the surface. The resulting coating offers superior durability, corrosion and wear resistance & excellent colour retention compared to other coating methods. This makes the Aceler water heater a reliable and long-lasting choice for customers seeking high-quality and efficient water heating.




# aceler

## WATER HEATER

VERTICAL

Product Specifications	AWHR30L-LC	AWHR50L-LC	AWHR80L-LC
Rated capacity	30L	50L	80L
Rated power	1500W	1500W	1500W
Voltage/Frequency	220V-240/50Hz 60Hz	220V-240/50Hz 60Hz	220V-240/50Hz 60Hz
Current	9.1A	9.1A	9.1A
heating power	Single Power	Single Power	Single Power
Material of inner tank	SPCC	SPCC	SPCC
enamel type	Blue Diamond Enamel	Blue Diamond Enamel	Blue Diamond Enamel
Heating element	316L+Enamel	316L+Enamel	316L+Enamel
Waterproof Degree	IPX4	IPX4	IPX4
Rated Pressure	0.7MPa	0.7MPa	0.7MPa
Product size (mm)	ø380*500	ø450*550	ø450*755

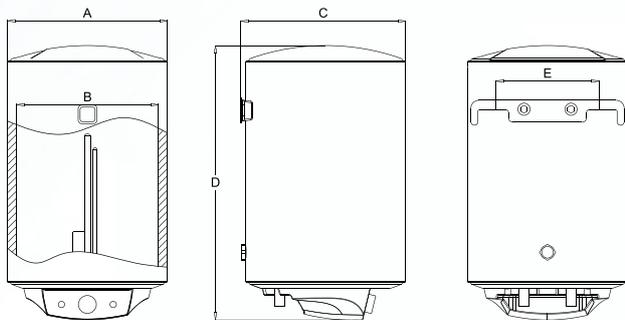

NUMBER	AWHR30L-LC	AWHR50L-LC	AWHR80L-LC
A (mm)	Φ380	Φ450	Φ450
B (mm)	Φ340	Φ410	Φ410
C (mm)	405	475	475
D (mm)	500	543	757
E (mm)	220	220	220

Note: The allowable error range of the above parameters is ±10%.




# aceler

## WATER HEATER

### HORIZONTAL

Product Specifications:	AWHR50H-LC	AWHR80H-LC
Rated capacity	50L	80L
Rated power	1500W	1500W
Voltage/Frequency	220V-240/50Hz 60Hz	220V-240/50Hz 60Hz
Current	9.1A	9.1A
heating power	Single Power	Single Power
Material of inner tank	SPCC	SPCC
enamel type	Blue Diamond Enamel	Blue Diamond Enamel
Heating element	316L+Enamel	316L+Enamel
Waterproof Degree	IPX4	IPX4
Rated Pressure	0.7MPa	0.7MPa
Product size (mm)	ø380*683	ø450*752

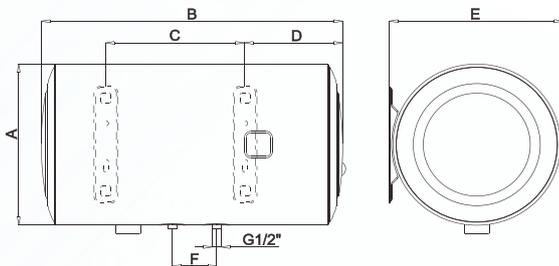

NUMBER	AWHR50H-LC	AWHR80H-LC
A(mm)	ø450	ø450
B(mm)	524	752
C(mm)	135	300
D(mm)	217	261
E(mm)	478	478
F(mm)	100	100

Note: The allowable error range of the above parameters is 10%

For Maintenance & Complaint : +971-50-1434066