



### COMFORT

- Temperature regulation

### EFFICIENCY&ENERGY SAVING

- Ecological polyurethane insulation

### QUALITY

- Titanium glasslined inner tank tested at 12 bar
- Oversize magnesium anode
- 5-bolts flange
- Pressure safety valve rated at 6 bar

### DESIGN


- Exclusive Italian design
- Wall-hung



علامة الجودة الإماراتية  
Emirates Quality Mark



**easy  
and safe**

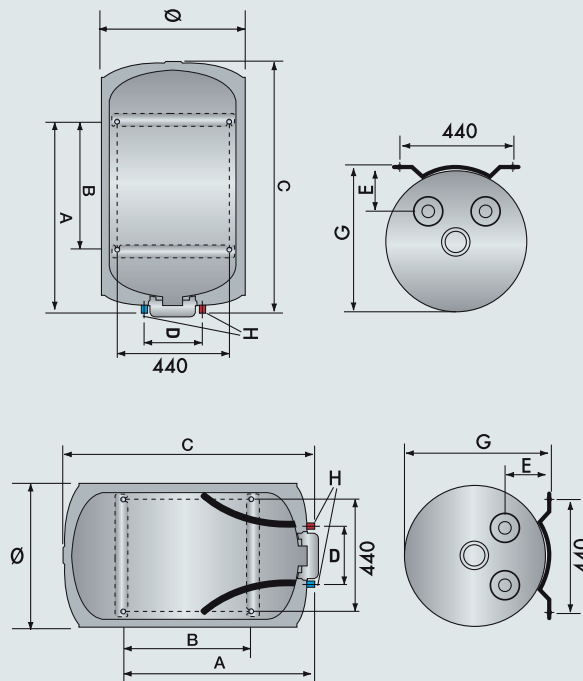

#### LEGEND

- E** Cold water inlet G 3/4"
- U** Hot water outlet G 3/4"

TECHNICAL DATA		ARI 150 V THER	ARI 150 H THER	ARI 200 V THER	ARI 200 H THER
Capacity	l	150	150	200	200
Power	kW	1,8	2	2,2	2
Voltage	V	230	230	230	230
Heating time (deltaT= 50°C)	h,min	5,10	4,40	5,35	5,50
Heat dispersion	kWh/24h	1,41	1,87	1,85	2,07
Max working temp.	°C	65	75	65	75
Protection	IP	IP25D	IP25	IP25D	IP25
Weight	kg	37	37	45	45
<b>OVERALL DIMENSIONS</b>					
a	mm	750	750	1050	1050
b	mm	500	500	800	800
c	mm	1010	1010	1270	1480
d	mm	230	230	230	230
e	mm	175	175	175	175
f	mm	560	560	560	510
g	mm	575	575	575	575
h	mm	G3/4	G3/4	G3/4	G3/4

#### CODE

	3000326	3000365	3000327	3000366
--	---------	---------	---------	---------